

Thinking ?

Here are eight good reasons to consider



HAND-SAFE

HOWELL'S SERIES C SAF-T-BAR



REGULAR

before committing to an 8 bar system

HOWELL SAF-T-BAR SERIES C

- METAL GUIDEWAYS** assure positive tracking of collector shoe. Collector tracks with or without insulating cover.
- FLAT CONTACT SURFACE** for long conductor wear and greatest possible sliding contact area.
- CONTACT SHOE** with flat contact surface of sintered copper and graphite, self-lubricating for effective draw of current to collectors.
- SKIN-TIGHT INSULATION** runs cooler, will not deform under clamping pressure.
- COMPACT MOUNTING** of conductor vertical or horizontal position without special parts or fittings.
- PANTOGRAPH SPRING** suspension of collector yields even pressure to shoe throughout stroke, providing maximum electrical and mechanical performance.
- SLIDE-ON JOINT** for fast, easy installation.
- HAND-SAFE** design provides protection against accidental contact.

8 SERIES SYSTEMS

Plastic guideways. Subject to wear, aging, temperature distortion, causing cover failure.

Collector contact shoe makes line contact.

Cover wear causes collector misalignment.


Cover wear causes collector jumping - contact shoe wear problems.

Cover break-out at sides, collector jumping. Cover subject to forced entry.

Conductor bows sideways if hanger is too tight. Collector jumping. Conductor lacks stiffness.

Lateral mount requires hangers on 4 ft. spacing, plus counter-balanced type collectors.

Collectors must have extra flex pig tail leads.

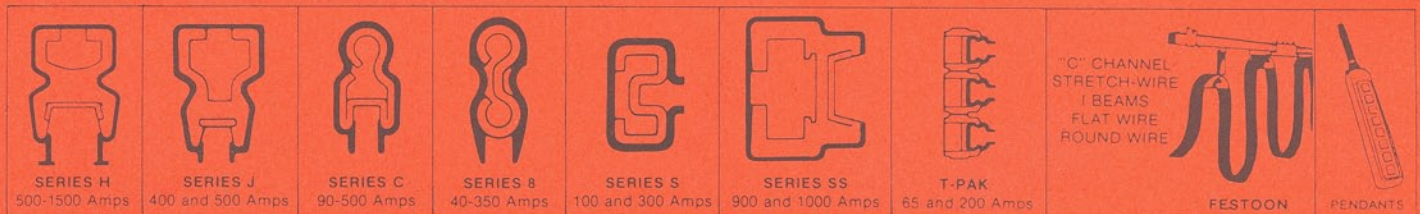

**INDUSTRIAL
POWER & CONTROL**
ENERGY SOLUTIONS FOR CRANES, HOISTS & MONORAILS

Toll Free: 1 (888) 822-2024
Fax: 1 (519) 822-2140
info@ipandc.com
www.ipandc.com